# **CABLE & WIRE CUTTERS**

### **HAND-HELD**

### LK-22A - Cable and wire cutter for CU/AL



Cutting Range:	Up to 25mm <sup>2</sup>
Length:	160mm
Max Diameter:	15mm
Weight:	0.19kg

### Notes:

Not Suitable for cutting steel wire, armoured cable and steel rope

### LK-38A - Cable and wire cutter for CU/AL



Cutting Range:	Up to 35mm <sup>2</sup>
Length:	190mm
Max Diameter:	7mm
Weight:	0.3kg

### Notes:

Not Suitable for cutting steel wire, armoured cable and steel rope

# **LK-60A** - Cable and wire cutter for CU/AL



Cutting Range:	Up to 60mm <sup>2</sup>
Length:	210mm
Max Diameter:	20mm
Weight:	0.4kg

### Notes:

Not Suitable for cutting steel wire, armoured cable and steel rope

# HS-50A - Cable and wire cutter for CU/AL



Cutting Range:	Up to 35mm <sup>2</sup>
Length:	200mm
Max Diameter:	11mm
Weight:	0.1kg

### Notes:

• Not Suitable for cutting steel wire, armoured cable and steel rope

# VK-60 - Cable and wire cutter for CU/AL



Cutting Range:	Up to 60mm <sup>2</sup>
Length:	200mm
Max Diameter:	20mm
Weight:	0.3kg

### Notes:

• Not Suitable for cutting steel wire, armoured cable and steel rope

### HS-95A - Cable and wire cutter for CU/AL



Cutting Range:	Up to 70mm <sup>2</sup>
Length:	220mm
Max Diameter:	15mm
Weight:	0.29kg

### Notes:

• Not Suitable for cutting steel wire, armoured cable and steel rope

# RATCHET

### **HS-325A** - Ratchet cable core cutter for CU/AL



Cutting Range:	Up to 240mm <sup>2</sup>	
Length:	260mm	
Max Diameter:	32mm	
Weight:	0.7kg	

### Notes:

Not Suitable for cutting steel wire, armoured cable and steel rope

### **LK-450A** - Ratchet cable core cutter for CU/AL



Cutting Range:	Up to 400mm²
Length:	240mm
Max Diameter:	45mm
Weight:	1.06kg

### Features:

Not Suitable for cutting steel wire, armoured cable and steel rope

### VC-500B - Heavy duty ratchet cable core cutter for CU/AL



Cutting Range:	Up to 500mm <sup>2</sup>
Length:	235mm
Max Diameter:	50mm
Weight:	1.02kg

### Notes:

- Extendable handles
- Not Suitable for cutting steel wire, armoured cable and steel rope

### HS-765 - Ratchet cable core cutter for CU/AL




Cutting Range:	Up to 400mm <sup>2</sup>
Length:	310mm
Max Diameter:	40mm
Weight:	1.02kg

### Notes:

• Not Suitable for cutting steel wire, armoured cable and steel rope


### HST75 - Ratchet cable core cutter for CU/AL



Cutting Range:	Armoured CU Up to 120mm <sup>2</sup> Armoured AL up to 75mm <sup>2</sup>
Length:	420mm
Max Diameter:	75mm
Weight:	3.6kg

- Suitable for cutting steel wire, armoured cable and steel rope
- Extendable hand grips

### **HST100** - Ratchet cable core cutter for CU/AL



Cutting Range:	Armoured CU Up to 300mm <sup>2</sup> Armoured AL up to 100mm <sup>2</sup>
Length:	490mm
Max Diameter:	100mm
Weight:	6.4kg

### Notes:

- Suitable for cutting steel wire, armoured cable and steel rope
- Extendable hand grips

# **CABLE & WIRE CUTTERS**

### HAND HELD

# LK-250 - Heavy duty cable cutter with long handles



Cutting Range:	Up to 250mm <sup>2</sup>
Length:	600mm
Weight:	1.2kg

### Notes:

Not Suitable for cutting steel wire, armoured cable and steel rope


# LK-500 - Heavy duty cable cutter with long handles

Cutting Range:	Up to 500mm <sup>2</sup>
Length:	800mm
Weight:	2.8kg

### Notes:

Not Suitable for cutting steel wire, armoured cable and steel rope

# L71060SC - Heavy duty wire rope cutters with long handles



Cutting Range:	7mm Ø steel rope or 5mm steel rod or up to 60mm² copper cable
Length:	300mm
Weight:	0.80kg

### Notes:

• Not Suitable for cutting steel wire and armoured cable

# L71200SC - Heavy duty wire rope cutter with long handles



Crimping Range:	14mm Ø steel rope or 9mm steel rod or up to 200mm² copper cable
Length:	600mm
Weight:	1.70kg

### Notes:

Not Suitable for cutting steel wire and armoured cable

# L71400SC - Energy saving heavy duty wire tope and cable cutter with long handles



Cutting Range:	16mm Ø steel rope or up to 200mm² copper cable
Length:	780mm
Weight:	3.2kg

### Notes:

<u>Suitable</u> for cutting steel wire, armoured cable and steel rope



# **CABLE & WIRE CUTTERS**



Length:	170mm
Weight:	0.328kg

### Notes:

- Thin blade cutter
- Automatic rebound spring
- No damaging of the conductor core

### FS-09 - Thin side cutter and wire stripper



Cutting Capacity:	1.3mm / 16AWG
Length:	170mm
Weight:	0.1kg
Material:	Stainless Steel

### Features:

 Applicable to cut off different kinds of thin wire, circuit board, plastic left over material

# HAND HELD

# **CONDUIT AND WIRING DUCT** (TRUNKING) CUTTERS





Length:	210mm
PVC Diameter:	34mm
Weight:	0.328kg

### Features:

- Portable slotted cable duct cutter designed for use with small sizes slotted plastic wiring ducts and covers.

  • Cuts EASCO Slotted Wiring Duct & Covers
- Locks into a slim, compact position for easy storage inside your tool box.
- Ratchet Release

L-42N - PVC wiring duct cutter for cutting solid and slotted PVC and PVC conduit wiring duct adaptor



Length:	240mm
PVC Diameter:	34mm
Weight:	0.28kg

- Locks into a slim, compact position for easy storage inside your tool box.
- Portable slotted cable duct cutter designed for use with small sizes slotted
- plastic wiring ducts and covers.
  Cuts EASCO Slotted Wiring Duct & Covers
- Ratchet Release



# CABLE TIES TENSIONING TOOLS

### HAND HELD

HS-600A - Metal cable tie tensioning tool with automatic tensioning and cut-off for Nylon 6.6 cable ties



Cable Tie widths:	2.3mm - 4.8mm
Length:	165mm
Weight:	0.3kg

### Features:

- Handles cable ties from 2.3mm to 4.8mm
- Adjustable tension control
- Neatly cuts end of cable ties

HS-600P - Plastic cable tie tensioning tool with automatic tensioning and cut-off for Nylon 6.6 cable ties



Cable Tie widths:	2.3mm - 4.8mm
Length:	165mm
Weight:	0.2kg

### Features:

• Light weight

# **D92137** - Heavy duty cable tie tensioning tool for Nylon 6.6 and Nylon 12 cable ties



Cable Tie widths:	2.5mm - 13mm
Length:	200mm
Weight:	0.25kg

### Features:

- Adjustable tension control
- Neatly cuts end of cable ties

# **HS-519** - Metal heavy duty cable tie tensioning tool for Nylon 6.6 and Nylon 12 cable ties



Cable Tie widths:	2.4mm - 9mm
Length:	195mm
Weight:	0.26kg

### Features:

Manual cable tie cut off

# D92134 - Cable tie tensioning tool with automatic tensioning and cut-off for stainless steel cable ties \_\_\_



	Cable Tie widths:	Up to 7.9mm
	Length:	178mm
	Weight:	0.68kg

### Features:

- Fastens and automatically cut ties with adjustable bundling pressure
- Tension adjusting indicator

# **D92134B** - Cable tie tensioning tool for Stainless Steel cable ties



Cable Tie widths:	Up to 7.9mm
Length:	180mm
Weight:	0.70kg

- Suitable for self locking stainless steel cable ties
- Easy cut off process
- Light weight

### HAND HELD

# **LY-600M** - Metal cable tie tensioning tool with automatic tensioning and cut-off

Cable Tie widths:	22mm - 48mm
Length:	300mm
Weight:	0.6kg


### Features:

- Adjustable bundling pressure
- TPR trigger handle for increase comfort



### **AUTO**

### **WIRE STRIPPERS**






Stripping Range:	0.5mm² - 2mm²
Length:	175mm
Weight:	0.36kg

### Features:

- Precise blade design hat does not damage the conductor or cores
- During stripping the wire is held firmly by clamping jaws with adjustable length stop
- The spring returns the stripper to the starting position





Stripping Range:	1mm² - 3.2mm²
Length:	175mm
Weight:	0.36kg

### Features:

- Precise blade design hat does not damage the conductor or cores
- During stripping the wire is held firmly by clamping jaws with adjustable length stop
- The spring returns the stripper to the starting position



Stripping Range:	1mm² - 3.2mm²
Length:	205mm
Weight:	0.3kg

### Features:

- Easy stripping without any adjustment
- For cutting & stripping wire and cable
- For crimping insulated and non-insulated terminals



Stripping Range:	0.6mm² - 6mm²
Length:	175mm
Weight:	0.22kg

- Automatic stripping diameter for different wire cross sections precise blade design fasilitated stripping without dmaging the conductor cores
- The spring returns the stripper to the starting position

# **AUTO**



Cutting Range:	0.25mm² - 6mm²
Length:	150mm
Weight:	0.36kg

### Features:

- Adjustable screw to facilitate acurate cutting
  The spring returns the stripper to the starting position



Cutting Capacity:	Up to 25mm²
Stripping Capacity:	0.9mm² - 6mm²
Length:	164.5mm
Weight:	0.4kg

### Features:

- Automatic rebound spring
- Will not damage the conductor or core

### FS-D3 - Self adjusting insulation wire stripper



Stripping Range:	0.8mm² - 2.5mm²
Length:	190mm
Weight:	0.148kg

- For stripping the plastic or ruber insulation of single, multiple cables and wires of 0.08 2.5mm²
   With wire cutter for copper and aluminium wires, multiple strands up to 6mm²
- Will not damage the conductor or core





# 1 | C | O | N |


### No. 4-28 Multi - Cable stripper with integrated stripping function for all standard flexible and solid cable



Stripping Range:	0.5mm² - 6mm²
AWG:	20-10
Length:	145mm
Weight:	0.061kg


### Features:

- Completely ergonomic & fully insulated
- Progressive regulation and easy to operate adjusting wheel
- Precise, quick and safe stripping

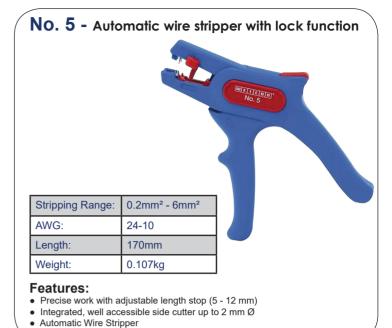




- Precise work with adjustable length stop (5 12 mm)
- Saves space by locking the strippers
- · Fully insulated, automatic Wire Stripper



- Precise work with optical length scale
- $\bullet\,$  Integrated, well accessible side cutter up to 3 mm Ø
- For many different cable types in building installation

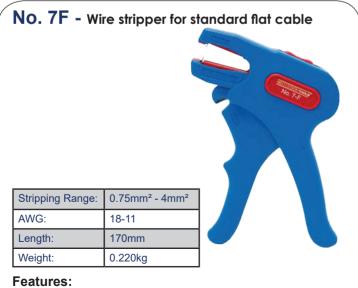

- Precise work with adjustable length stop (up to 26mm) (5/16 1")
- Integrated, well accessible side cutter up to 3 mm Ø (1/8")
- Automatic Wire Stripper

# No. 1F - Quick coaxial cable stripper



Stripping Range:	4.8mm² - 7.5mm²
Length:	125mm
Weight:	0.047kg

- Gripping jaws for screwing F-connectors on the cable
   Space-saving mounting or dismounting of F-connectors by integrated open
- hexagon with 11 mm wrench size (SW 11)
- Stripping without adjusting the blades with length stop for all common F-connectors (6/4 mm)

### WEICON



### No. 2 - Ergonomically designed coaxial cable stripper



Stripping Range:	4.8mm² - 7.5mm²
Length:	110mm
Weight:	0.028kg

### Features:

- There is no need to adjust the cutting depth
- Also suitable for flexible cables
- Two-level stripping of all common coaxial cables

# No. 3 - Multi level stripper for coaxial cable



Stripping Range:	4.8mm² - 7.5mm²
Length:	125mm
Weight:	0.055kg

### Features:

- Also suitable for flexible cables
- $\bullet$  Integrated and well accessible side cutter up to 8 mm Ø
- Allows two- or three-level stripping of all common coaxial cables

# No. 13 - Round cable stripper



Stripping Range:	8mm² - 13mm²
Length:	120mm
Weight:	0.044kg

### Features:

- · Flush stripping even in hard-to-reach areas
- It is not necessary to adjust the cutting depth
- For all standard round cables

### No. 10 - Data cable stripper (Cat5, Cat6, Cat7)



Stripping Range:	4.5mm² - 10mm²
Length:	140mm
Weight:	0.048kg

### Features:

- Integrated length stop, adjustable to the required sheath opening of network outlets and other plugs (3-10 cm)
- Safe work with the ergonomic anti-slip handle shape

# No. 300 Due Crimper - Cable stripper and



Stripping Range:	0.5mm² - 6mm²
Crimping Range:	0.5mm <sup>2</sup> - 2.5mm <sup>2</sup> 4.0mm <sup>2</sup> - 6.0mm <sup>2</sup>
AWG:	20-10
Length:	160mm
Weight:	0.116kg

### Features:

- Two crimping ranges are offered (0.5 2.5 mm² and 4.0 6.0 mm²) according to DIN 46228-2
- Integrated, well accessible side cutter up to 6 mm²

### No. 30 - Multi purpose data cable stripper



Stripping Range:	0.05mm² - 0.5mm²
AWG:	30-20
Length:	125mm
Weight:	0.060kg

- Stripping of conductors and stranded wires e.g. telephones lines
   Precise stripping with adjustable length stop (3.5 14 mm)
- Integrated, well accessible side cutter up to 8 mm Ø Removal of the outer insulation on data cables



### NO. 3 Mini Solar - Quick stripper for all common solar cables



Stripping Range:	1.5mm² - 6mm²
AWG:	15-9
Length:	125mm
Weight:	0.058kg

### Features:

- Quick stripping of all common solar cables
- Precise work with adjustable length stop (6 28 mm)
- Integrated, well accessible side cutter up to 4 mm² (15 AWG)

### No. 7 Solar - Automatic wire stripper for all common solar cables



### Features:

- Precise work with adjustable length stop (up to 26mm)
- Integrated, well accessible side cutter up to 3 mm Ø
- Automatic Wire Stripper

### No. 35 - Cable scissors for cutting, stripping and crimping cables



Stripping Range:	CU/AL: <35mm² CU/AL: <50mm²
Length:	150mm
Weight:	0.090kg

### Features:

- · 2-Component handles for increased safety
- Blades made of special stainless steel

### Easy Opener - Ideal for loosening switches, luminaires or similar components



Length:	180mm
Weight:	0.022kg

### Features:

- Ideal for loosening switches, luminaires or similar components
   Slim and filigree design flexible and stable at the same time
- Three surfaces with different material thickness

### Starter Set Pro - Ideal selection for house installation

Strippers Included:	No. S4-28 Multi, No. 2, No. 5, No. 13
Case Size:	255mm x 20mm x 60mm
Weight:	0.575kg

### Features:

 The Professional Starter Set is the basic equipment for craftsmen in the fields of electrical, heating and customer service, and is also suitable for the home and hobby.





Multi Opener - Ideal tool to gently open sensitive equipment and dismounting clipped housing



Length:	180mm
Weight:	0.22kg

### Features:


- No scratching of sensitive surfaces
   Conductive ESD material protects against electrostatic discharge
   Flexible fibreglass-reinforced polyamide

### No. 400 - Multi level stripper



Stripping Range:	0.5mm² - 6mm²
Length:	155mm
Weight:	0.79kg

- Flush stripping , even in hard-to-reach areas
- Safe and space saving storage with closing clip
   Circular cutting longitudinal cutting stripping cutting

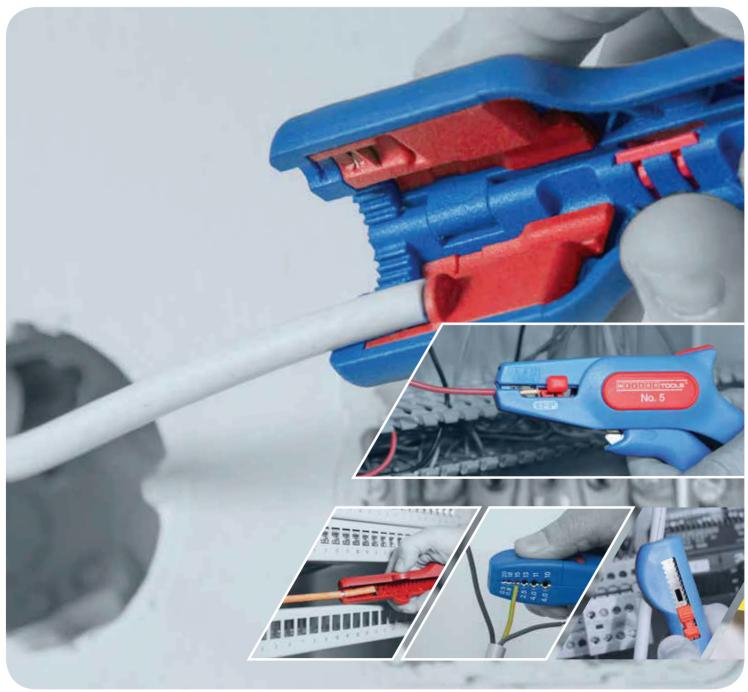



Crimping Range:	0.5mm² - 6mm²
Length:	254mm
Weight:	0.603kg
AWG	20-11


### Features:

- Pressure Adjustment
- Ratchet release

# AP-03C - Ratchet energy saving crimping tool for pre-insulated terminals Crimping Range: 0.5mm² - 6mm² Length: 250mm Weight: 0.55kg AWG 20-10

### Features:

- Continuous crimping at preset tension ensures accurate crimp
- Ratchet release
- Pressure adjustment





Crimping Range:	1.5mm² - 2.5mm²
Length:	250mm
Weight:	0.55kg
AWG	15-13

### Features:


- Continuous crimping at preset tension ensures accurate crimp
- Ratchet release
- Pressure adjustment





Crimping Range:	0.5mm² - 6mm²
Length:	230mm
Weight:	0.57kg
AWG	20-10

- Continuous crimping at preset tension ensures accurate crimp
- Ratchet release
- Pressure adjustment

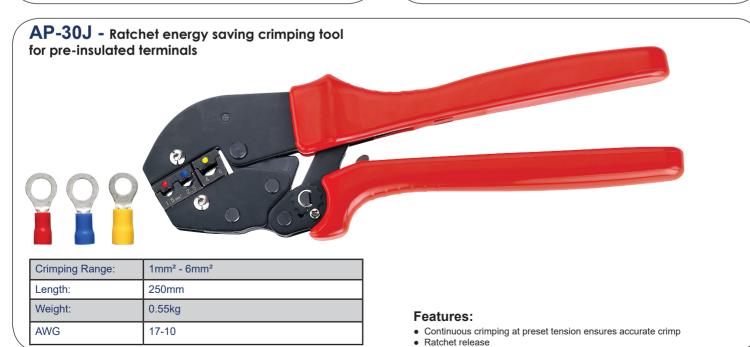

# **PRE-INSULATED**






Crimping Range:	0.5mm² - 2.5mm²
Length:	170mm
Weight:	0.305kg
AWG	20-13

### Features:

Low cost


- Ratchet Release
- Pressure adjustment

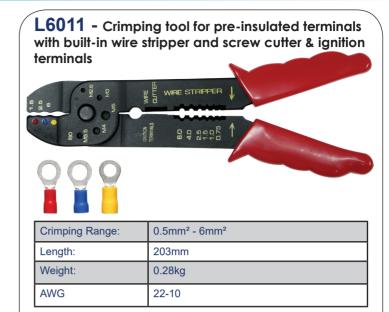

### Features:


• Low cost



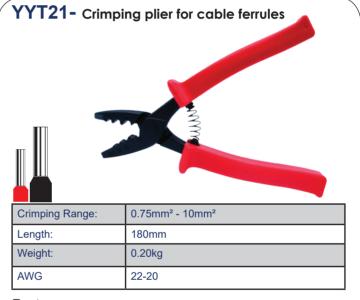

### Features:

Plier type with spring assist

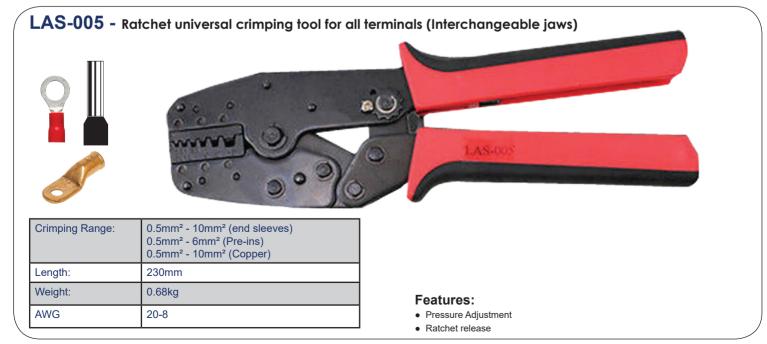

AP-04WFL - Ratchet energy saving crimping tool for bootlace ferrules (end sleeves)



Crimping Range:	0.5mm² - 6mm²
Length:	250mm
Weight:	0.6kg
AWG:	20-11

### Features:

- Ratchet Release
- Pressure Adjustment

# YAC-5 - Ratchet crimping tool for bootlace ferrules (end sleeves)



Crimping Range:	0.5mm² - 6mm²
Length:	200mm
Weight:	0.4kg
AWG:	12-4

### Features:

- Ratchet Release
- Pressure Adjustment

# AP-26TW - Ratchet energy saving crimping tool for <u>double</u> bootlace ferrules (end sleeves)



Crimping Range:	2 x 0.5mm² - 2 x 6mm²
Length:	250mm
Weight:	0.73kg
AWG:	2 x 20-10

### Features:

- Ratchet Release
- Pressure Adjustment

# YAC-6 - Ratchet crimping tool for bootlace ferrules (end sleeves)



Crimping Range:	0.5mm² - 16mm²
Length:	203mm
Weight:	0.4kg
AWG:	12-4

### Features:

- Ratchet Release
- Pressure Adjustment

# HSC8 6-4 - Ratchet square crimping tool for bootlace ferrules (end sleeves)



Crimping Range:	0.25mm² - 6mm²
Length:	175mm
Weight:	0.38kg
AWG:	23-11

### Features:

- Ratchet Release
- Pressure Adjustment
- Self adjusting

# HSC8 6-6 - Ratchet hexagonal crimp crimping tool for bootlace ferrules (end sleeves)



Crimping Range:	0.25mm² - 6mm²
Length:	175mm
Weight:	0.38kg
AWG:	23-10

- Ratchet Release
- Pressure Adjustment
- Self adjusting

# VH2-35WFL - Spring operated crimping tool for bootlace ferrules (end sleeves)



Crimping Range:	10mm² - 35mm²
Length:	200mm
Weight:	0.5kgkg
AWG:	7-2

### Features:

- Ratchet Release
- Pressure Adjustment

# YAC-9 - Hexagonal ratchet crimping tool for bootlace ferrules (end sleeves)



Crimping Range:	0.08mm² - 6mm²
Length:	170mm
Weight:	0.38kg
AWG:	28-10

### Features:

- Ratchet Release
- Pressure Adjustment
- Self adjusting

# YAC-8 - Square ratchet crimping tool for bootlace ferrules (end sleeves)



Crimping Range:	0.08mm² - 6mm²
Length:	175mm
Weight:	038kg
AWG:	28-10

### Features:

- Ratchet Release
- Pressure Adjustment
- Self adjusting

# HSC8 16-4 - Ratchet square crimp crimping tool for bootlace ferrules (end sleeves)



Crimping Range:	4mm² - 6mm²
Length:	210mm
Weight:	0.52kg
AWG:	12-6

### Features:

- Ratchet Release
- Pressure Adjustment
- Self adjusting

# VH1-06WF - Mini ratchet crimping tool for bootlace ferrules (end sleeves)



Crimping Range:	0.25mm² - 6mm²
Length:	170mm
Weight:	0.305kg
AWG:	23-11

### Features:

- Ratchet Release
- Pressure Adjustment

# YYT-22 - Spring operated crimping tool for bootlace ferrules (end sleeves) Crimping Range: 0.5mm² - 2.5mm² Length: 150mm Weight: 0.18kg AWG: 24-14

### Features:

Spring operated

VH1-48B - Mini ratchet crimping tool for brass roll-in terminals (open barrel terminals)



Crimping Range:	0.5mm² - 2.5mm²
Length:	170mm
Weight:	0.34kg
AWG:	20-13

### Features:

- Ratchet Release
- Pressure Adjustment

AP-03B - Ratchet energy crimping tool for brass roll-in terminals (open barrel terminals)



Crimping Range:	0.5mm² - 6mm²
Length:	250mm
Weight:	0.55kg
AWG:	20-13

### Features:

- Ratchet Release
- Pressure Adjustment

**HS-03B** - Ratchet crimping tool for brass roll-in terminals (open barrel terminals)



Crimping Range:	1.5mm² - 6mm²
Length:	230mm
Weight:	0.6kg
AWG:	28-15

### Features:


- Ratchet Release
- Pressure Adjustment

YYT11 - Ratchet crimping tool for brass roll-in terminals (open barrel terminals)



Crimping Range:	0.5mm² - 6mm²
Lenght:	227mm
Weight:	0.56kg
AWG:	22-10

- Ratchet Release
- Pressure Adjustment

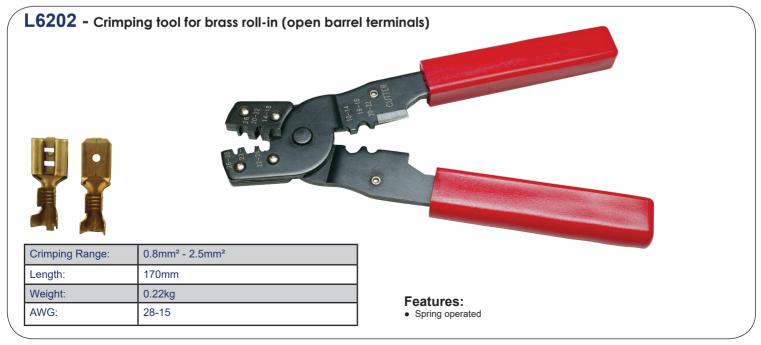

### **COPPER LUGS AND FERRULES**

AP-101 - Ratchet energy saving crimping tool for copper lugs and ferrules



Crimping Range:	0.5mm² - 10mm²
Length:	250mm
Weight:	0.60kg

### Features:

- Suitable for crimping non-insulated connector
   Carbon steel with hardened and tempered jaws ensures acurate crimp
- Perfect handle gripping position and structure guarantee high crimping quality

### **HEXA6-10** - Ratchet indent crimpng tool for copper lugs and ferrules



Crimping Range:	0.5mm² - 6mm²
Length:	200mm
Weight:	0.38kg

### Features:

Ratchet Release

### **HEXB-16** - Ratchet indent crimping tool for copper lugs and ferrules



Crimping Range:	1.5mm² - 16mm²
Length:	330mm
Weight:	0.66kg

### Features:

• Ratchet Release

### HS-8 - Ratchet indent crimping tool for copper lugs and ferrules



Crimping Range:	1.25mm² - 8mm²
Length:	270mm
Weight:	0.60kg

### Features:

Ratchet Release

### HS-16 - Ratchet indent crimping tool for copper lugs and ferrules



Crimping Range:	1.25mm² - 16mm²
Length:	270mm
Weight:	0.70kg

### Features:

Ratchet Release

### **HS-22** - Ratchet indent crimping tool for copper lugs and ferrules



Crimping Range:	5.5mm² - 25mm²
Length:	360mm
Weight:	0.84kg

### Features:

Ratchet Release

# HS-38 - Ratchet indent crimping tool for copper lugs and ferrules




Crimping Range:	6mm² - 38mm²
Length:	354mm
Weight:	0.86kg

### Features:

- Ergonomic handle design and providing a comfortable grip, more convenient operation.
- Labor-saving ratchet device, easy operation, clear crimping effects.
- The small size, simple operation and lock-controlled switch ensure endurablity and good performance.

# **HX-120B** - Hexagonal tool with moveable and revolving dies

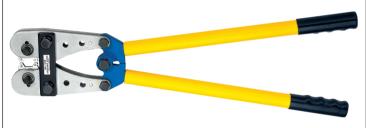

Crimping Range:	10mm² - 120mm²
Length:	620mm
Weight:	4.0kg

### Features:

- Easy operation: press to rotate the inside dies
- Has an anti-slip handle for a safe application for heavy crimping works
- Used for non-welding and standard electrical connection
- Made of hardened steel,long life, accurate bore diameter and good crimping effect

# **HX4** - Ratchet hexagonal crimping tool for copper lugs and ferrules




Crimping Range:	1mm² - 4mm²
Length:	270mm
Weight:	0.45kg

### Features:

Ratchet Release

# **HX-50B** - Hexagonal tool with moveable and revolving dies

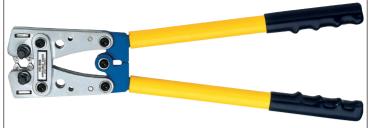


Crimping Range:	6mm² - 50mm²
Length:	390mm
Weight:	1.72kg

### Features:

- Easy operation: press to rotate the inside dies
- Has an anti-slip handle for a safe application for heavy crimping works
- Used for non-welding and standard electrical connection
- Made of hardened steel,long life, accurate bore diameter and good crimping effect

# **HX-150B** - Hexagonal tool with moveable and revolving dies

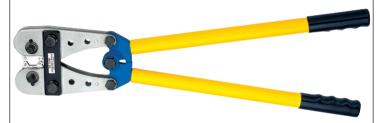

Crimping Range:	25mm² - 150mm²
Length:	620mm
Weight:	4.0kg

### Features:

- Easy operation: press to rotate the inside dies
- Has an anti-slip handle for a safe application for heavy crimping works
- Used for non-welding and standard electrical connection
- Made of hardened steel,long life, accurate bore diameter and good crimping effect

# **HX-10** - Ratchet hexagonal crimping tool for copper lugs and ferrules



Crimping Range:	2mm² - 10mm²
Length:	270mm
Weight:	0.55kg

### Features:

Ratchet Release

# **CRIMPING TOOLS**

# **COPPER LUGS AND FERRULES**

**HX16** - Ratchet hexagonal crimping tool for copper lugs and ferrules



Crimping Range:	6mm² - 16mm²
Length:	270mm
Weight:	0.52kg

### Features:

Ratchet Release

# **HX25** - Ratchet hexagonal crimping tool for copper lugs and ferrules



Crimping Range:	6mm² - 25mm²
Length:	270mm
Weight:	0.80kg

### Features:

Ratchet Release

# L6095YO - Indent crimping tool for copper lugs and ferrules



Crimping Range:	10mm² - 120mm²
Length:	570mm
Weight:	3.12kg

### Features:

Adjustable nest dies

# YYT8 - Ratchet crimping tool for copper lugs and ferrules



Crimping Range:	1.5mm² - 10mm²
Length:	262mm
Weight:	0.58kg

### Features:

• Ratchet Release

# VH2-12 - Oval terminal crimper



Crimping Range:	6mm² - 10mm²
Length:	200mm
Weight:	0.5kg
AWG:	10-7

### Features:

- Ratchet Release
- Pressure Adjustment

# HS-12 - Oval terminal crimper



Crimping Range:	0.5mm² - 6mm²
Length:	254mm
Weight:	0.600kg
AWG:	20-11

- Ratchet Release
- Pressure Adjustment





Length:		250mn	n			
Weight:		0.6kg				
$\bigcirc$		$\bigcirc$	$\bigcirc$ I	$\bigcirc$	01	
	6.5mm	4.5mm		1.72mm		

### Features:

- Ratchet Release
- Pressure Adjustment

### YAC-3 - Co-Axial hex crimping tool





Crimping Range:	1.72mm² - 8.2mm²
Length:	240mm
Weight:	0.52kg

### Features:

- Ratchet Release
- Pressure Adjustment

# **MODULAR CONNECTORS**

# **CRIMPING TOOLS**

# HT-500R - Ratchet modular crimping tool

55, 58, 59, 62, 140, 223, 303, 400, Fiber Optic, Belden 827



Crimping Range:	RJ45, RJ11/12
Length:	190mm
Weight:	0.45kg

### Features:

Ratchet Release

## $\mathsf{HT}\text{-}\mathsf{568R}$ - Ratchet modular crimping tool



Crimping Range:	RJ11/12, FJ45
Length:	190mm
Weight:	0.51kg

### Features:

• Ratchet Release

### HT-86 - Ratchet modular crimping tool



	Crimping Range:	RJ11/12, FJ45
	Length:	190mm
	Weight:	0.28kg

### Features:

Ratchet Release

### HT200R - Ratchet modular crimping tool



Crimping Range:	RJ10, RJ11/12, FJ45
Length:	205mm
Weight:	0.51kg

### Features:

Ratchet Release

### **MODULAR CONNECTORS**

### $\mathsf{TL}\text{-}2008R$ - Ratchet modular crimping tool

Crimping Range:	RJ45, PJ12, RJ11
Length:	185mm
Weight:	0.48kg

### Features:

• Ratchet Release



# **CRIMPING TOOLS**

### **MOLEX TERMINALS**

### YAC13 - Molex type terminal crimping tool (2.54/3.96)

Crimping Range:	0.08mm² - 0.8mm²
Length:	175mm
Weight:	0.42kg
AWG:	28-18

### Features:

- Ratchet Release
- Pressure Adjustment



# **CRIMPING TOOLS**

### **DEUTSCH TYPE TERMINALS**





Crimping Range:	0.5mm² - 1.5mm²
Length:	165MM
Weight:	0.28kg
AWG:	22-16

### Features:

- Ratchet Release
- Self Adjusting



Crimping Range:	0.33mm² - 1.12mm²
Length:	230mm
Weight:	0.68kg
AWG:	26-10

### Features:

- Repetive, high crimping quality due to interal lock (Self releasing mechanism)
- Optimum transmission of force due to highly effective lever action for fatigue-reduced operation

# **TDW2** - Ratchet crimping tool. For four mandrel turned contact. Deutsch type terminal crimper

Crimping Range:	0.21mm² - 3.16mm²
Length:	230mm
Weight:	0.45kg
AWG:	24-12

- Repetive, high crimping quality due to interal lock (Self releasing mechanism)
- Optimum transmission of force due to highly effective lever action for fatigue-reduced operation



### CPC-85FR - Cable and wire cutter for CU/AL



Cutting Range:	85mm
Length:	710mm
Output:	6.7 Tons
Weight:	12.5kg

### Notes

- For copper, aluminium cable and telephone cable.
- The head can be easiy opened to allow the cutting of running cables
- NOT for armoured cable

### CPC-85H - Cable and wire cutter for CU/AL





### Notes:

- Two stage pumping action for rapid blade movement
- Head rotates 180°
- NOT for armoured cable





Cutting Range:	Barb Cu Strand: 42mm Barb AL Strand: 46mm Telephone cable CCP:100mm Lead Sheathed Cable: 100mm Underground Cable: 75mm
Length:	560mm
Output:	7.5 Tons
Weight:	11kg

### Features:

NOT for armoured cable

# CPC-130H - Hydraulic cable cutter



Cutting Range:	Cu/AL: 130mm
Length:	600mm
Lengin.	OUUIIIII
Output:	7 Tons
Weight:	13kg

### Features:

- Bolt lock head
- NOT for armoured cable

# CPC-105KH - Hydraulic cable cutter, scissor



Cutting Range:	105mm² Cu/AL
Lenght:	540mm
Output:	13.7 Tons
Weight:	10.50kg

### Features:

NOT for armoured cable

# CPC-120KH - Hydraulic cable cutter, scissor type blade



Cutting Range:	120mm² Cu/AL
Length:	620mm
Output:	13.7 Tons
Weight:	12.96kg

### Features:

NOT for armoured cable

# CPC-65A - Hydraulic cable cutter, scissor type blade



Cutting Range:	65mm² Cu/AL
Length:	600mm
Output:	6.7 Tons
Weight:	4.08kg

### Features:

• NOT for armoured cable

# CPC-85K - Hydraulic cable cutter



Cutting Range:	85mm² Cu/AL
Length:	600mm
Output:	6.7 Tons
Weight:	4.5kg

### Features:

- NOT for armoured cable
- Metal Case included

# CGG40 - Hydraulic cutting tool (hand-held)



Cutting Range:	40mm²
Length:	645mm
Weight:	5.88kg

- Carry bag included
- NOT for armoured cable





Crimping Range:	16mm² - 240mm²
Length:	460mm
Output:	12 Tons
Accessories:	Case and Dies
Weight:	4.5kg
Dies Included:	25mm, 35mm, 50mm, 70mm, 95mm, 120mm, 150mm, 185mm, 240mm

### Features:

• Manual release

### HP-240F - Hydraulic crimping tool (hand-held)



Crimping Range:	16mm² - 240mm²
Length:	380mm
Output:	5 Tons
Accessories:	Case and Dies
Weight:	3kg
RAM Stroke:	15mm
Dies Included:	16mm, 25mm, 35mm, 50mm, 70mm, 95mm, 120mm, 150mm, 185mm, 240mm

### Features:

Auto pressure valve

# HP-240 - Hydraulic crimping tool (hand-held)



16mm, 25mm, 35mm, 50mm, 70mm, 95mm, 120mm, 150mm, 185mm, 240mm

### Features:

Manual release

Dies Included:

### **HP-300** - Hydraulic crimping tool (hand-held)



Crimping Range:	16mm² - 300mm²
Length:	480mm
Output:	12 Tons
Accessories:	Case and Dies
Weight:	3.9kg
RAM Stroke:	18mm
Dies Included:	16mm, 25mm, 35mm, 50mm, 70mm, 95mm, 120mm, 150mm, 185mm, 240mm, 300mm

### Features:

Manual Release

# CO-630A for use with CFP800 - Hydraulic crimping tool head

Crimping Range:	150mm² - 630mm²
Output:	35 Tons/10000PSI working Pressure
Length:	360mm
Weight:	16.5kg
RAM Stroke:	25mm
Accessories:	Case and Dies
Dies included:	150mm, 185mm, 240mm, 300mm, 400mm, 500mm, 630mm

### Features:

• Case Included



# **CRIMPING**



Crimping Range:	50mm² - 400mm²
Length:	620mm
Output:	12 Tons
Weight:	6.5kg
RAM Stroke:	30mm
Dies Included:	50mm, 70mm, 95mm, 120mm, 150mm, 240mm, 300mm, 400mm

### Features:

• Twist release



Crimping Range:	50mm² - 400mm²
Length:	650mm
Output:	13 Tons
Weight:	7.2kg
RAM Stroke:	38mm
Dies included:	50mm, 70mm, 95mm, 120mm, 150mm, 185mm, 240mm, 300mm, 400mm

### Features:

Twist Release

### CYO-430H for use with CFP800 -

Hydraulic crimping tool head



Crimping Range:	50mm² - 400mm²
Output:	12 Tons
Weight:	4kg
Length:	340mm
RAM Stroke:	30mm
Accessories:	Case and Dies
Dies included:	50mm, 70mm, 95mm, 120mm, 150mm, 185mm, 240mm, 300mm, 400mm

### Features:

Case included

# CYO-510H - Hydraulic crimping tool head



Crimping Range:	50mm² - 400mm²
Length:	340mm
Output:	13 Tons
Weight:	5kg
RAM Stroke:	38mm
Dies Included:	50mm, 70mm, 95mm, 120mm, 150mm, 240mm, 300mm, 400mm

### Features:

Case included



Crimping Range:	10mm² - 500mm² CU/AL
Length:	650mm
Output:	50kN
Weight:	4.3kg

### Features:

Auto release

MAP-8W - Hydraulic hole punch 360° adjustable head for punching holes in electrical switchboards and panels



Max Thickness:	Mild Steel: 3.2mm² Staninless steel: 1.6mm²
Punching Force:	8.9 Tons
Dies Included:	21.8mm, 22.6mm, 54.1mm, 42.7mm, 48.7mm, 60.2mm

### Notes:

- · Includes plastic carry case
- It contain hydraulic punch driver, with 360 degree rotatable head for flexible operation in place.
- With the help of hydraulic system, making holes by hand become fast and easy

MAP-8RA - Hydraulic hole punch with extended head 360° adjustable for punching holes in electrical switchboards and panels



Max Thickness:	Mild Steel: 3.2mm² Stainless Steel: 16mm²
Punching Force:	16 Tons
Dies Included:	21.8mm, 22.6mm, 54.1mm, 42.7mm,
	48.7mm, 60.2mm

### Notes:

Includes plastic carry case

MAP-8A - Inline hydraulic hole punch 360° adjustable for punching holes in electrical switchboards and panels



Max Thickness:	Mild Steel: 3.2mm² Staninless steel: 1.6mm²
Punching Force:	16 Tons
Dies Included:	21.8mm, 22.6mm, 54.1mm, 42.7mm,
	48.7mm, 60.2mm

### Notes:

- Includes plastic carry case
- It contain hydraulic punch driver.
- With straight head, compact and easy carrying.
- With the help of hydraulic system, making holes by hand become fast & easy
- 360 degree head design for flexible operation in place.

MAP-8ZA- Hydraulic hole punch with swivel head (90° Head) for punching holes in electrical switchboards and panels



Max Thickness:	Mild Steel: 3.2mm² Staninless steel: 1.6mm²
Punching Force:	8.9 Tons
Dies Included:	21.8mm, 22.6mm, 54.1mm, 42.7mm, 48.7mm, 60.2mm

### Notes:

Includes plastic carry case

**SYK-15** - Compact, light and fast hydraulic hole punch 360° adjustable for punching holes in electrical switchboards and panels

Punching Range:	Mild Steel: below 3mm (Ø 16.5 - 115.5mm) Staninless steel: 1.6mm <sup>2</sup>
Punching Force:	15 Tons
Dies Included:	Round Punch: Ø 220mm, 27.5mm, 34.3mm, 43.0mm, 60.8mm, up to 115.5mm
	Square Punch: 32.0 x 32.0mm

### Notes:

- Small rod, large rod and O-ring set
- Includes plastic carry case



### **FOOT PUMP**

CFP-800 - Foot operated, 2 stage, hydraulic pump complete with hose and female coupling

Pressure:	700 Bar 10 000psi
Weight:	17.7kg

### Features:

- Single-acting foot pump
- With pressure release lever with wide bottom frame
- High pressure oil pipe supplied
- Foot operated style
- Quick couple kept fast connection with compatible tools
- Double speed unit: for quick operation, allow quick oil delivery under no load condition (12.26cc/stroke) and then build sufficient working pressure under load condition (20-700 bar)
- · Safety valve: automatically relieves pressure when rated pressure is reached, to protect hydraulic system from over pressure
- Packed with steel case packing for easy carrying and protect pumps well during shipping



### **BATTERY OPERATED TOOLS**

### **CRIMPING**

BPL55OA1120 - Inline Hydraulic crimping tool, battery operated hand grip crimping tool

















Crimping Range:	6mm² - 240mm² CU/AL
Weight:	2.9kg
Battery:	18V
Length:	128mm
Accessories:	Case and Charger
Dies Available:	6/35; 10/50; 16/70; 25/95; 4/120; 150; 185; 240

### Features:

- Robust plastic housing with rubber grip handle Quick opening and closing head, 180° rotatable with interchangeables dies and wide crimping
- Maximum operating speed with high performance motor
- Quick motor stop function for high user safety
- Simple display panel with light diode for battery charge level, crimping failure and maintenance control
- Manual retraction when crimp is complete
- Large and ergonomics triggers
- Pressure safety system to prevent over pressure failures
- Energy saving function by stopping tool after 10 min unused USB connection for data analysis & preventive maintenance with dedicate
- Workplace illumination by LED

BPL62OA1120 - Inline hydraulic crimping tool, battery operated hand grip crimping tool



Crimping F	Range:	6mm² - 300mm² CU/AL
Weight:		2.9kg
Battery:		18V
Length:		128mm
Accessorie	es:	Case and Charger
Dies availa	able:	6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300

- Robust plastic housing with rubber grip handle
  Quick opening and closing head, 180° rotatable with interchangeables dies and wide crimping
- Maximum operating speed with high performance motor
- · Quick motor stop function for high user safety
- Simple display panel with light diode for battery charge level, crimping failure and maintenance control
- Manual retraction when crimp is complete
- Large and ergonomics triggers
- Pressure safety system to prevent over pressure failures
- Energy saving function by stopping tool after 10 min unused USB connection for data analysis & preventive maintenance with dedicate
- Workplace illumination by LED

### **FOOT PUMP**

CFP-800 - Foot operated, 2 stage, hydraulic pump complete with hose and female coupling

Pressure:	700 Bar 10 000psi
Weight:	17.7kg

### Features:

- Single-acting foot pump
- With pressure release lever with wide bottom frame
- High pressure oil pipe supplied
- Foot operated style
- Quick couple kept fast connection with compatible tools
- Double speed unit: for quick operation, allow quick oil delivery under no load condition (12.26cc/stroke) and then build sufficient working pressure under load condition (20-700 bar)
- · Safety valve: automatically relieves pressure when rated pressure is reached, to protect hydraulic system from over pressure
- Packed with steel case packing for easy carrying and protect pumps well during shipping



### **BATTERY OPERATED TOOLS**

### **CRIMPING**

BPL55OA1120 - Inline Hydraulic crimping tool, battery operated hand grip crimping tool

















Crimping Range:	6mm² - 240mm² CU/AL
Weight:	2.9kg
Battery:	18V
Length:	128mm
Accessories:	Case and Charger
Dies Available:	6/35; 10/50; 16/70; 25/95; 4/120; 150; 185; 240

### Features:


- Robust plastic housing with rubber grip handle Quick opening and closing head, 180° rotatable with interchangeables dies and wide crimping
- Maximum operating speed with high performance motor
- Quick motor stop function for high user safety
- Simple display panel with light diode for battery charge level, crimping failure and maintenance control
- Manual retraction when crimp is complete
- Large and ergonomics triggers
- Pressure safety system to prevent over pressure failures
- Energy saving function by stopping tool after 10 min unused USB connection for data analysis & preventive maintenance with dedicate
- Workplace illumination by LED

BPL62OA1120 - Inline hydraulic crimping tool, battery operated hand grip crimping tool



Crimping F	Range:	6mm² - 300mm² CU/AL
Weight:		2.9kg
Battery:		18V
Length:		128mm
Accessorie	es:	Case and Charger
Dies availa	able:	6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300

- Robust plastic housing with rubber grip handle
  Quick opening and closing head, 180° rotatable with interchangeables dies and wide crimping
- Maximum operating speed with high performance motor
- · Quick motor stop function for high user safety
- Simple display panel with light diode for battery charge level, crimping failure and maintenance control
- Manual retraction when crimp is complete
- Large and ergonomics triggers
- Pressure safety system to prevent over pressure failures
- Energy saving function by stopping tool after 10 min unused USB connection for data analysis & preventive maintenance with dedicate
- Workplace illumination by LED





Crimping Range:	10mm² - 5000mm² CU/AL
Weight:	4.75kg
Battery:	18V
Lenght:	370mm
Force:	50kN

### Features:

- Carry case and charger included
- Rotative head 360°
- Simple hydraulic system
- Lighter & smaller





Crimping Range:	10mm² - 240mm² CU/AL
Weight:	6.1kg
Battery:	18V
Length:	430mm
Force:	50kN

### Features:

- Carry case and charger included Rotative head 360°
- 2 Speed hydraulic system

### EMT-400C - Battery operated crimping tool



Crimping Range:	16mm² - 400mm² CU/AL
RAM:	42mm
Weight:	7.7kg
Battery:	18V, 3Ah
Accessories:	Plastic case, 1 Charger, 2 batteries
Dies included:	16mm, 25mm, 35mm, 50mm, 70mm, 95mm, 120mm, 150mm, 185mm, 240mm, 300mm, 400mm

### Features:

- C-Shape Tool Head design allows operator to directly place cable between dies, do not need to remove locking bolt or open tool head
   Automatically releases pressure and retracts ram when crimping is complete
- Immediately stop motor and do not retract ram when operator releases switch during operation
- LED illumination for easier operation in dark place, LED indicator let operator charge battery in time
- Powerful motor ensures sufficient working force
- High-performance battery allows longer working time with one charge





Crimping Range:	16mm² - 240mm²
Length:	480mm
Weight:	3.15kg
Battery:	18V
Output:	12 Tons
Accessories:	Case and Dies
Dies available:	16mm, 25mm, 35mm, 50mm, 70mm, 95mm, 120mm, 150mm, 185mm, 240mm, 300mm

- Light weight, turnable head
- Pistol design in a solid housing

### **CRIMPING**



Crimping Range:	6mm² - 400mm² CU/AL
Weight:	6.5kg
Battery:	18V
Length:	400mm

### Features:

- Robust plastic housing with rubber grip handle
- Open C crimping head, 360° rotatable with interchangeables dies and wide crimping
- Maximum operating speed with high performance motor, with
- Quick motor stop function for high user safety
- Manual retraction when crimp is complete
- Rocking triggers system to prevent improper usage
- Pressure safety system to prevent over pressure failures
   Energy saving function by stopping tool after 10 min unused
- USB connection for data analysis & preventive maintenance with dedicated
- · Handling ring for safety cable or transportation



### Features:

- Robust plastic housing with rubber grip handle
- Open C crimping head, 360° rotatable with interchangeables dies and wide
- Quick motor stop function for high user safety
- Manual retraction when crimp is complete
- Rocking triggers system to prevent improper usage
- Pressure safety system to prevent over pressure failures
- Energy saving function by stopping tool after 10 min unused
- USB connection for data analysis & preventive maintenance with dedicated software



Crimping Range:	40mm² - 180mm² CU/AL
Weight:	8.5kg
Battery:	18V
Length:	510mm

### Features:

- Carry Case included
- New reinforced blades
- Indentical blade & counter blade
- Interchangeable blades
- Rotative head 220°
- · Locking pin



7.4kg 18V

480mm

### Features:

Weight:

Battery: Length:

- Carry Case included
- New reinforced blades
- Indentical blade & counter blade
- Interchangeable blades
- Rotative head 180°
- · Locking pin