

UNI-T®

IT'S ALL ABOUT THE QUALITY

Summer SPECIALS

THREED
AGENCIES
THE CABLE ACCESSORY COMPANY

Promotion runs from 1 September 2025 to 31 December 2025 or while stocks last. Prices exclude VAT. E & OE. www.uni-trend.co.za

UT12E DUAL MODE AC VOLTAGE DETECTOR

- AC Voltage: 90V ~ 1000V AC
- AC Voltage: 24V ~ 1000V AC
- Frequency: 50/60Hz
- Sensitivity
- Switching: Auto
- Audible/Visual Alarm
- Flashlight
- Vibration Mode
- Dual Insulation
- Neutral/Live Line Distinction
- APO
- Low Voltage Indication
- Indication LED: Green/Red/Yellow

excl VAT
R299.00

UT200A+ DIGITAL CLAMP METER

- AC Current: 400A
- AC Voltage: 600V
- Resistance: 30kΩ
- Jaw Capacity 28mm
- Continuity Buzzer
- Backlight
- 3099 Display Count
- DC Voltage: 600 V
- Frequency: 10H ~ 10kHz
- Auto Range
- Diode
- High Voltage Warning
- Flashlight

excl VAT
R499.00

UT136C+ MULTIMETER

- AC/DC Voltage: 1000 V
- AC/DC Current: 10A
- Resistance: 40MΩ
- Capacitance: 40mF
- Frequency: 400Hz ~ 40MHz
- Temperature: -40°C ~ 1000°C
- APO
- Data Hold
- hFE Transistor Test
- Diode
- NCV
- Low Battery Indication
- Overload Alarm
- Test Probe Holder
- Backlight
- 4000 Display Count

excl VAT
R693.00

UT216B TRMS CLAMP METER

- AC Current: 600A
- AC Voltage: 750V
- DC Voltage: 1000V
- Resistance: 60MΩ
- Capacitance: 60mF
- Frequency: 1MHz
- Jaw capacity: 30mm
- Auto Ranging
- Diode
- V.F.C.
- NCV
- Data Hold
- MAX/MIN/REL
- LCD Backlight
- Flashlight
- Continuity Buzzer
- Low Battery Indication
- Input Protection
- 6000 Display Count

excl VAT
R1 668.00

UT216A 600A TRMS CLAMP METER

- AC Current: 600A
- DC Voltage: 1000 V
- AC Voltage: 750V
- Resistance: 60MΩ
- Capacitance: 60mF
- Jaw Capacity 30mm
- Auto Range
- Diode
- NCV
- Data Hold
- Flashlight
- APO
- MAX/MIN/REL
- LCD Backlight
- Continuity Buzzer
- Low Battery Indication
- Input Protection
- 6000 Display Count

excl VAT
R1 283.00

UT204+ 600A TRMS CLAMP METER

- AC/DC Current: 600A
- AC/DC Voltage: 600 V
- Resistance: 60MΩ
- Frequency: 10MHz
- Capacitance: 60mF
- Temperature: -40°C ~ 1000°C
- Auto Range
- Neutral/Live Wire Test
- Continuity Buzzer
- Data Hold
- Diode Test
- Jaw Capacity 28mm
- Relative Mode
- 6000 Display Count
- NCV
- APO

excl VAT
R1 313.00



UT33A+ PALM SIZE MULTIMETER

- AC/DC Voltage: 600 V
- AC/DC Current: 10A
- Resistance: 200MΩ
- Capacitance: 2mF
- APO
- Diode
- Continuity Buzzer
- LCD Backlight
- Relative Mode
- Auto Range
- LCD Size 53mm x 28mm
- Probe Placing Slots
- 2000 Display Count

excl VAT
R431.00

UT213A CLAMP METER

- AC Current: 400A
- AC/DC Voltage: 600 V
- Resistance: 40MΩ
- Frequency: 1MHz
- Capacitance: 100μF
- Jaw Capacity 30mm
- Auto Range
- Diode
- NCV
- Data Hold
- Relative Mode
- LCD Backlight
- Flashlight
- Continuity Buzzer
- Low Battery Indication
- Input Protection
- 4000 Display Count

excl VAT
R956.00



UT133A MULTIMETER

- AC/DC Voltage: 600 V
- Resistance: 60MΩ
- Frequency: 10Hz ~ 1MHz
- Temperature: 1000°C
- Diode
- Low Battery Indication
- Overload Indication
- LCD Backlight
- Auto Range
- DC Current: 10A
- Capacitance: 9.999mF
- APO
- Continuity Buzzer
- Data Hold
- Test Probe Holder
- NCV
- 6000 Display Count

excl VAT
R297.00



UT213B CLAMP METER

- AC Current: 400A
- AC/DC Voltage: 600 V
- Resistance: 40MΩ
- Frequency: 1MHz
- Capacitance: 40mF
- Temperature: -40°C ~ 1000°C
- Jaw Capacity 30mm
- Auto Range
- Diode
- NCV
- Data Hold
- MIN/MAX/REL Mode
- Flashlight
- APO
- Continuity Buzzer
- Low Battery Indication
- Input Protection
- 4000 Display Count

excl VAT
R1 084.00

UT123 POCKET SIZE HOUSEHOLD MULTIMETER

- AC/DC Voltage: 600V
- Temperature: -40°C ~ 300°C
- Acousto-optic Indication
- APO
- Continuity Buzzer
- EBTN Screen
- Resistance: 20MΩ
- Data Hold
- NCV
- Low Battery Indication
- 4000 Display Count

excl VAT
R403.00



UT206B TRMS CLAMP METER

- AC Current: 1000A
- AC/DC Voltage: 1000 V
- Resistance: 60MΩ
- Capacitance: 60mF
- Frequency: 10Hz ~ 1MHz
- Temperature: -40°C ~ 1000°C
- Jaw Capacity 42mm
- Inrush Current: 1000A
- Auto Range
- Diode
- NCV
- Data Hold
- MAX/MIN/REL
- Flashlight
- LCD Backlight
- Continuity Buzzer
- Low Battery Indication
- 6000 Display Count

excl VAT
R1 895.00

UT207B TRMS CLAMP METER

- AC/DC Current: 1000A
- AC/DC Voltage: 1000V
- Resistance: 60MΩ
- Capacitance: 60mF
- Frequency: 40Hz ~ 400Hz
- Auto/Manual Range
- Jaw Capacity 42mm
- Diode
- APO
- Data Hold
- MAX/MIN/REL
- LCD Backlight
- Flashlight
- Continuity Test
- NCV
- Low Battery Indication
- Overload Indication
- High Voltage Warning
- 6000 Display Count

excl VAT
R1 994.00



UT161B TRMS MULTIMETER

- AC/DC Voltage: 1000 V
- AC/DC Current: 10A
- Resistance: 60MΩ
- Frequency: 10Hz ~ 10MHz
- Capacitance: 60mF
- MAX/MIN
- Diode
- Continuity Buzzer
- hFE Transistor
- Relative Mode
- NCV
- Analog Bar
- Data Hold
- USB Communications
- LCD Backlight
- Low Battery Indication
- Auto Power Off
- Display Count 6000
- INTERTEK Approved

excl VAT
R5 495.00

UT890D+ TRMS MULTIMETER

- DC Voltage: 1000 V
- AC Voltage: 750V
- AC/DC Current: 20A
- ACV Frequency: 10Hz ~ 10kHz
- Resistance: 60MΩ
- Frequency: 9.999MHz
- Capacitance: 100mF
- NCV
- MAX/MIN
- Diode
- Continuity Buzzer
- APO
- hFE Transistor
- High Voltage Phase Detection
- Data Hold
- LCD Backlight
- Low Battery Indication
- Fuse Blowing Alarm
- Acoust-Optic Indication
- Relative Mode
- Current (AC/DC) Mode Memory
- Over Current Alarm
- 6000 Display Count

excl VAT
R603.00



UT222 - 2500A TRMS CLAMP METER

- AC/DC Current: 2500A
- AC/DC Voltage: 1000V
- Resistance: 60MΩ
- Capacitance: 60mF
- Frequency: 60MHz
- Temperature: -40°C ~ 1000°C
- Auto Range
- Jaw Capacity 63mm
- Data Hold
- Relative Mode
- MAX
- Diode
- Continuity Buzzer
- Low Battery Indication
- Analog Bar Graph 61
- MIN/I-OUT Function
- AC + DC Dual Display
- Low Pass Filter
- Inrush Current
- Data Storage 1000
- 6000 Display Count

excl VAT
R1 433.00



UT61B+ MULTIMETER

- AC/DC Voltage: 1000 V
- AC/DC Current: 10A
- Resistance: 60MΩ
- Frequency: 10Hz ~ 10MHz
- Capacitance: 60mF
- MAX/MIN
- Diode
- Continuity Buzzer
- Relative Mode
- NCV
- LCD Backlight
- Auto Power Off
- Analog Bar
- Data Hold
- Low Battery Indication
- Display Count 6000

excl VAT
R1 835.00



a member of the **Hudaco** group

Promotion runs from 1 September 2025 to 31 December 2025 or while stocks last. Prices exclude VAT. E & OE. www.uni-trend.co.za

UT195E PROFESSIONAL TRMS IP65 MULTIMETER

- AC/DC Voltage: 1000V
- AC/DC Current: 20A
- Capacitance: 60mF
- Auto/Manual Ranging
- Flashlight & Auto LCD Backlight
- Analogue Bar Graph
- Sampling Rate: 3 times/sec
- Continuity Buzzer
- Low Battery Indication
- 6000 Display Count
- LoZ ACV: 600V
- Resistance: 60MΩ
- Frequency: 10MHz
- Duty Cycle
- Data Hold
- Diode
- MAX/MIN
- APO

excl VAT
R2 986.00



UT195EX PROFESSIONAL TRMS IP65 MULTIMETER

- AC/DC Voltage: 1000 V
- LoZ ACV : 600V
- AC/DC Current: 20A
- Resistance: 60MΩ
- Capacitance: 60mF
- Frequency: 10MHz
- Ex Rating: Ex ia IIC Ma Ga
- Ex tb IIIC T200°C Db IP65
- Auto/Manual Ranging
- Duty Cycle
- Flashlight & Auto LCD Backlight
- Analogue Bar Graph
- Sampling Rate: 3 times/sec
- Diode
- MAX/MIN
- Data Hold
- Continuity Buzzer
- Low Battery Indication
- 6000 Display Count

excl VAT
R3 774.00



UT677A BATTERY INTERNAL RESISTANCE TESTER

- Battery Internal Resistance Range: 0.0mΩ ~ 3mΩ
- Batter Voltage Range: 0.0V ~ 71V
- Temperature Range: -10°C ~ 60°C
- Screen: 3.5 inches
- Response Time: 200ms
- Measuring Time: 2sec
- USB Interface
- Bluetooth
- Data hold and Storage
- Measurement Judgement Function
- APO

excl VAT
R8 500.00



UT302A+ INFRARED THERMOMETER

- Temperature: -32°C ~ 700°C
- Accuracy: +/- 1.5°C
- D:S Ratio: 20:1
- Response Time: 250ms
- Spectral Response: 8μm~14μm
- Laser Power: < 1mW
- Selection °C/°F
- APO
- Low Battery Indication
- MAX/MIN/AVG/DIFF
- High/Low Temp LED & Audible Alarm
- Display Colour EBTN
- Lock Measurement
- Single Laser
- Repeatability: 0.7°C
- Emissivity: 0.1 ~ 1.0
- Data Hold
- LCD Backlight

excl VAT
R1 699.00



UT15C VOLTAGE TESTER (VOLTSTICK)

- LED AC/DC Voltage Indication (V) 12V ~ 690V
- LCD AC/DC Voltage Display (V) 24V ~ 690V
- Phase Rotation Test
- Single Lead (L2) Voltage Detection
- Continuity Test: Resistance 0~400kΩ, Beeper LED Light Indicator
- Polarity Detection
- Auto Range
- Low Battery Indication
- Work Light

excl VAT
R1 068.00



excl VAT
R2 045.00

UT501B 1kV INSULATION TESTER

- Insulation Test Voltage: 250V/500V/1000V
- Short Circuit Current: < 2mA
- Low Resistance: 0.01Ω ~ 200Ω
- AC Voltage: 600V
- Auto Ranging
- Low Battery Indication
- Alarm Indication
- Over Load Indication
- Auto Discharge
- Continuity
- DAR
- LCD Backlight
- Alarm Buzzer
- PI
- High Voltage Indication
- 10MΩ Internal Resistance Test
- 2000 Display Count

UT330TH DATA LOGGER

- Temperature Range: -30°C ~ 70°C
- Accuracy: +/- 0.4°C
- Resolution: 0.1°C
- Humidity: 0%RH ~ 100%RH
- IP67
- °C / °F Selection
- Data Storage 64 000 • Data Recall
- USB Interface
- Auto Record Time Setup
- User Name Settings
- Start Mode Setup
- LED Alarm
- Alarm Threshold
- Alarm Mode Setup
- Low Battery Indication

excl VAT
R1 027.00



UT521 2000Ω EARTH GROUND TESTER

- Earth Resistance Testing Range: 0 ~ 2000Ω
- Frequency (Hz) 50Hz/60Hz
- Manual Range
- LCD Backlight
- Full Icon Display
- Double Insulation Protection
- Data Hold
- Contact Badness Display
- Over-range Display
- Simple 2-wire Testing
- Precision 3-wire Testing
- APO
- 2000 Display Count
- AC Earth Voltage (V) 0 ~ 200V
- Data Storage 20
- Low Battery Indication

excl VAT
R3 919.00



LM60MI - MINI LASER DISTANCE METER

- Range: 60m
- Measurement Units: m/ft/in
- Laser Class: 2
- Laser Type: 630 ~ 670nm, <1mW
- Single Measurement
- Continuous Measurement
- MAX/MIN
- Pythagoras
- Data Storage 99
- Auto Laser Off
- Volume
- Add/Subtract
- APO

excl VAT
R1 027.00

UT18D VOLTAGE AND CONTINUITY TESTER

- LCD AC/DC Voltage Display (V) 6V ~ 690V
- Phase Rotation Test
- Single Lead (L2) Voltage Detection
- Continuity Test: Resistance 0~100kΩ, Beeper LED Light Indicator
- Polarity Detection
- Auto Range
- Low Battery Indication
- Over Voltage Prompt
- Flashlight
- Buzzer & Silent Mode
- Test Live Voltage Without Batteries
- LCD Backlight

excl VAT
R1 222.00



UT306S INFRARED THERMOMETER

- Single Laser
- Temperature: -50°C ~ 500°C
- Accuracy: +/- 2°C
- D:S Ratio: 12:1
- TN-LCD Display
- Emissivity: 0.1 ~ 1.0 Adjustable
- °C/°F Selection
- High/Low Temperature Alarm
- Laser On/Off
- APO
- Low Battery Indication
- MAX/MIN/AVG/DIFF Modes
- Response Time: 500s
- Data Hold

excl VAT
R340.00



UT320D MINI DUAL CONTACT THERMOMETER

- Measurement Range: -50 ~ 1300°C
- Dual Display Mode T1 & T2
- Difference Measurement T1 - T2
- MAX/MIN/AVG
- Backlight
- Data Hold
- APO
- Low Battery Indication
- Selection °C/°F
- Dual Thermocouples
- Mode Selection K/J

excl VAT
R786.00



LM320B ANGLE METER

- Measurement Range: 4 x 90°
- Accuracy: +/- 0.2°
- Resolution: 0.01°
- Display: EBTN
- Laser Indication: Two Side Lasers
- Magnet Base: Four-side Magnets
- Relative / Absolute Measurement
- Low Battery Indication
- Data Hold
- Portable and Lightweight
- Unique Laser Design
- APO

excl VAT
R1 064.00



LM50A LASER DISTANCE METER

- Range: 50m
- Measurement Units: m/ft/in
- Min. Display Unit: 0.001m
- Measurement Basis: Front/Rear
- Accuracy: +/- 2mm
- Laser Class: 2
- Laser Type: 630 ~ 670nm, <1mW
- Single Measurement
- Continuous Measurement
- MAX/MIN/AREA
- Pythagoras
- Self Calibration
- Horizontal Bubble
- Data Storage 99 Groups
- APO
- Auto Laser Off
- Display Type: LCD
- Display Size: 50mm
- Audio Indication
- Volume
- Add/Subtract

LM600G GOLF RANGE FINDER

- Distance Range: 3m ~ 600m
- Height: 250m
- Speed Range: 0 ~ 300km/h
- Magnification: 6x
- Angle: +/- 60°
- Eye Piece Aperture: 15mm
- Exit Pupil Diameter: 3.7mm
- Flagpole Lock
- Golf Trajectory Compensation Mode
- Slope Measurement
- APO
- Accuracy: 0.2%
- Power: 3.7V Li-ion
- Objective Aperture: 19mm

excl VAT
R1 064.00



LM570LD-II LASER LEVELER

- Laser Type: Green LD
- Laser Line: 2 Lines
- Operating Distance: 10m
- Laser Wavelength: 520nm
- Laser Class: 2
- Laser Accuracy: +/-3mm/10m
- Self-Leveling Range: +/- 3°
- Self-Leveling Time: < 3s
- Working Hours: > 4h

excl VAT
R1 427.00



excl VAT
R2 409.00



UT303C+ INFRARED THERMOMETER

- Temperature: -32°C ~ 1300°C
- Accuracy: +/- 1.5°C
- Repeatability: 0.7°C
- D:S Ratio: 30:1
- Response Time: 250ms
- Selection °C/°F
- Emissivity: 0.1 ~ 1.0 Adjustable
- Data Hold
- Spectral Response: 8μm~14μm
- Laser Power: < 1mW
- Data Storage 99
- Low Battery Indication
- Circular Laser
- MAX/MIN/AVG/DIFF
- LCD Backlight
- Lock Measurement
- High/Low LED & Audible alarm
- Schedule Measurement
- LCD Display Colour EBTN

excl VAT
R3 147.00



excl VAT
R684.00

UT333S MINI TEMPERATURE & HUMIDITY METER (HYGROMETER)

- Temp Range: 10 ~ 60°C
- Humidity Range: 0 ~ 100%RH
- Sampling Rate 1/s
- Low Battery Indication
- LCD Backlight
- Unit Selection °C/°F
- Overload Alarm
- Data Hold
- MAX/MIN
- Power ON/OFF
- Split Design
- APO



UT665 BORESCOPE

- Pixels: 640 x 480
- Field of View: 60°
- Image Brightness: 6 levels - adjustable
- Illumination: 4 levels - adjustable
- Image Rotation
- Battery Power Indication
- Video Signal: Analog
- IP67 (Probe Only)
- Focal Length: 20mm ~ 100mm
- 4 LED Lights
- Probe Length: 1m (3m Option Available)
- Lens Dia.: 9mm
- LCD Size: 60mm
- Screen Type: TFT
- Depth Of View: >20mm



excl VAT
R2 082.00

UT673PV SOLAR MPPT METER

- Max Power Measurement: 5 ~ 800W
- Max Power Current: 0 ~ 35A
- Max Power Voltage: 12 ~ 60V
- Open Circuit Current: 12 ~ 60V
- Short Circuit Current: 0 ~ 35A
- Reverse Polarity Connect Protection
- Over Voltage Protection
- Over Current Protection
- Over Temperature Protection
- Over Power Protection
- Manual / Auto MPPT Test
- Data Hold



excl VAT
R1 070.00

UT593 COMPLIANCE TESTER - MULTI FUNCTIONAL

- AC Voltage: 440V
- DC Voltage: 440V
- Insulation Test: 250/500/1000V
- Phase Rotation
- Prospective Short Circuit: 26kA
- RCD Test Current: 10/30/100/300/500mA
- Low Ohm Measurement
- Loop Impedance
- ELCB Test (Time & Sensitivity)
- APO
- LCD Backlight
- Low Battery Indication
- Phase Switch (RCD) 0 ~ 180°
- Auto Half-wave Test
- 10 000 Display Count



excl VAT
R12 699.00

excl VAT
R8 396.00

UT312A VIBRATION TESTER

- Acceleration (PEAK): 0.1m/s²
- Velocity: 0.1mm/s
- Displacement: 0.001 ~ 1.999mm
- Automatically rotatable screen
- High/low frequency acceleration
- Datahold
- LCD Backlight
- Battery Indication
- Flashlight
- APO
- USB C



excl VAT
R635.00

UT377A MINI WOOD MOISTURE METER

- Wood Moisture Measurement: 2 ~ 40%
- Refresh Rate: 2 times
- Auto Range
- APO
- Low Battery Indication
- Data Hold
- MAX/MIN
- Backlight
- Ambient Temperature Correction
- 1m Drop Test
- Wood, Paper, Plywood and Other Wooden Materials

excl VAT
R635.00

UT25CL CABLE LOCATOR

- Output Signal: 33KHZ
- Energized Wire Voltage Range: AC/DC: 8~480V; AV: 50/60Hz
- Screen: Segment Mode LCD
- Signal Strength: Three Level
- Bipolar Test
- ELV LED Indicator
- Manual Sensitivity Adjustment
- Backlight
- Unipolar Test
- Flashlight



excl VAT
R4 096.00

excl VAT
R972.00

UT377C PINLESS MOISTURE METER

- Wood and Building Material Measurement: 4 ~ 99%
- Temperature Measurement: -20°C ~ 70°C
- Sensor Size: 50 x 50mm
- Minimum Target Size: 50 x 50mm
- Target Thickness Range: 6 ~ 30mm
- Screen Display: EBTN Colour Screen
- Simulation Bar Indication
- Audible Alarm Indication
- Flashlight
- APO
- Measurement mode: Softwood, Hardwood, Drywall, Masonry



excl VAT
R8 719.00

UT273+ CLAMP EARTH RESISTANCE TESTER

- Earth Resistance: 0.01Ω ~ 600Ω
- AC Current: 20A
- Jaw Size: 55mm x 32mm
- Timer
- Screen: 4 Digits EBTN Screen
- USB Cable
- Data Storage 500 sets
- Anti-Interference
- Overload Protection
- Alarm Function
- Battery state Indication
- APO



excl VAT
R2 535.00

UT363S MINI ANEMOMETER

- Wind Speed Rate: 0.4 ~ 30m/s
- Temperature Range: -10°C ~ 50°C
- Beaufort Wind Scale 0~12 level
- Sampling Rate 0.5/s
- Data Hold
- Split Design
- Low Battery Indication
- AVG Mode
- Wind Speed Unit Selection m/s, km/h, ft/min, knots, mph
- Temperature °C/°F
- Overload Indication
- Auto Range
- APO
- MAX/MIN
- LCD Backlight



UT675A BATTERY TESTER WITH PRINTER

- 12V Battery Test: 7 ~ 16V DC
- 12V/24V Cranking System Test: 7 ~ 30V DC
- 12V/24V Charging system test: 7 ~ 30V DC
- Battery Type: Ordinary Lead Acid Battery, AGM Flat Plate Battery, AGM Spiral Battery, GEL Battery, EFB Battery
- Battery Capacity: 3 ~ 250Ah
- Over Voltage Protection
- Reverse Connection Protection
- A Prompt For Poor Contact
- Battery Status, Life and Capacity Display
- Battery Internal Resistance Display
- USB Communication
- Printing Function
- Four-Terminal Kelvin Test
- Test without Battery Disassembly
- LED Colour Indication for Test Results



excl VAT
R2 809.00

UT682D WIRE TRACKER

- Wire Types: Telephone Lines/Twisted Pair/Electric Wire
- Telephone Wire Test Distance ≥3000m
- Polarity Indication for Phone Lines
- Transmitter Output Voltage: 8V DC
- Transmitter Power Supply: 9V Battery
- Receiver Power Supply: 9V Battery
- Polarity Indication for Telephone Wires
- Max Receiver Operating Current 40mA
- Max Receiver Standby Current 10mA



excl VAT
R650.00

UT512- 1KV INSULATION RESISTANCE MULTIMETER

- 1KV Digital Insulation Resistance Tester
- Insulation Resistance up to 100GΩ
- DC Voltage: 600V
- AC Voltage: 600V
- Analogue Bar Graph (30 Segments)
- Data Logging 18
- Polarization Index (Pi)
- Dielectric Absorption (DAR)
- Insulation Voltages: 500/1000V/1500V/2500V
- Short Circuit Current < 1.8mA
- Auto Ranging
- High Voltage Indication
- Over-Range Warning
- LCD Backlight
- Low Resistance: 0.1 ~ 999.9Ω
- Low Battery Indication
- Comparison Measurement
- 10000 Display Count




excl VAT
R4 444.00

UT219PV PROFESSIONAL AC/DC DIGITAL CLAMP METER

- ACA/DCA Current: 999.9A
- ACV Voltage: 1500V • DCV Voltage: 2500V
- DC mV Voltage: 999.9mV
- ACV: 999.9V • ACA: 999.9A
- ACA Flex Clamp Sensor: 3000A
- Power DC: 2500kVA
- Frequency: 5.0Hz ~ 999.9Hz
- Resistance: 99.99kΩ
- Capacitance: 1000μF
- Temperature: -40°C ~ 400°C
- True RMS • Display Count: 9999
- Jaw Opening: 35mm
- Solar Panel Polarity Indication
- High Voltage Alarm
- Over Range Indication
- Auto Hold
- Inrush Current
- APO
- Data hold
- Overload Indication
- Low Battery Indication
- PEAK
- LCD Screen
- Bluetooth
- True RMS



excl VAT
R7 016.00

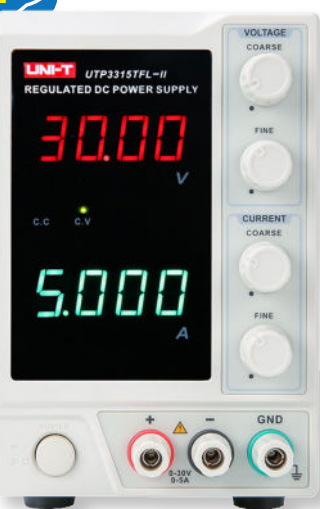

UTP3315TFL-II POWER SUPPLY

- Output Voltage: 0-30V
- Output Current: 0-5A
- Output Power: 150W
- Ripple Noise: ≤ 0.8mVrms
- Reliability: MTBF(e): ≥2000hrs
- Display Mode: LED Voltage and Current Dual Display

excl VAT
R3 409.00

UT196 1700V DC TRUE RMS PROFESSIONAL MULTIMETER-SOLAR PRO

- AC Voltage: 1500 V
- DC Voltage: 1700 V
- Resistance: 60MΩ
- Frequency: 1MHz
- Capacitance: 60mF
- True RMS
- Dual Display • Low Pass Filter
- Auto Range • NCV
- MAX/MIN
- Continuity Buzzer
- Relative Mode • Analog Bar
- Flashlight Backlight
- Low Battery Indication
- Auto Power Off
- Display Count 6000



UT383BT MINI LIGHT METER

- Illuminance Measurement (Lux): 0 ~ 199,900 Lux
- Illuminance Measurement (FC): 0 ~ 18,500FC
- Resolution: 1 Lux, 10Lux, 100Lux, 1FC, 10FC
- Sampling Rate: 0.5/s
- Bluetooth App
- Bluetooth
- Data Hold
- APO
- Low Battery Indication
- MAX/MIN
- LCD Backlight
- Overload Indication
- Tripod Mounting Hole



excl VAT
R794.00

UT681L CABLE TESTER RJ45/RJ11

- Cable Tester for RJ45/RJ11
- Fast-speed Test Mode LED1~8, LED_G
- Slow-speed Test Mode LED ~ LED*, LED_G
- Test for Short Circuit, Crossover, Open Circuit etc
- Ethernet Cable - Shielded / Unshielded
- Manual Shutdown Function
- Single Key Operation
- Low Battery Detection
- APO
- 9V Battery



UT503PV PV INSULATION TESTER

- Insulation Test Voltage: 125V / 250V / 500V / 1000V
- DC Voltage: 5 ~ 1000V
- AC Voltage: 5 ~ 600V
- Rated Current: 1.0mA
- Short Circuit Current: IR Measurement: < 1.5mA; PV IR Measurement: < 1.2mA
- Continue Measurement
- Compare Function
- Time Measurement
- Stepping Voltage
- Auto Discharge
- High Voltage Alarm
- DUT Live Test
- Backlight
- Data Storage 1000 Sets
- USB & Bluetooth



UT336A REFRIGERANT LEAK DETECTOR

- Sensor: Negative Corona Sensor
- Maximum Sensitivity: 3g/a
- Warm-up Time: 3s
- Sensitivity Adjustment: 6 Levels
- Alarm Light: 6 Levels
- Battery Status
- Zero Reset
- Mute
- APO




UT251C HIGH SENSITIVITY LEAKAGE CURRENT CLAMP METER

- Leakage Current AC: 0.001mA ~ 600A
- Jaw capacity: 35 ~ 40mm
- Resolution: 1mA
- Auto Ranging
- Diode
- Data / Peak Hold
- Overload Protection
- Low Battery Indication
- Display 4 Digit LCD
- Data Storage 99
- Over-Range Display
- RS-232
- APO



UTD2052CL+ 50MHz STORAGE OSCILLOSCOPE

- Channels: 2 (Dual)
- Bandwidth: 50MHz
- Sample Rate: 500MS/s
- Rise Time: < 7s
- Memory Depth: 64kpts
- Waveform Capture Rate: 5000wfms/s
- Power: 100 ~ 240VAC, 50Hz/60Hz
- Vertical Scale: 1mV/div ~ 20V/div
- Time-Based Range: 5ns/div ~ 50s/div
- Storage: Setup, Wave, Bitmap
- Trigger Modes: Edge, Pulse, Alternate
- Interface USB-OTG
- Display 7 Inch TFT LCD, WVGA (400x240)

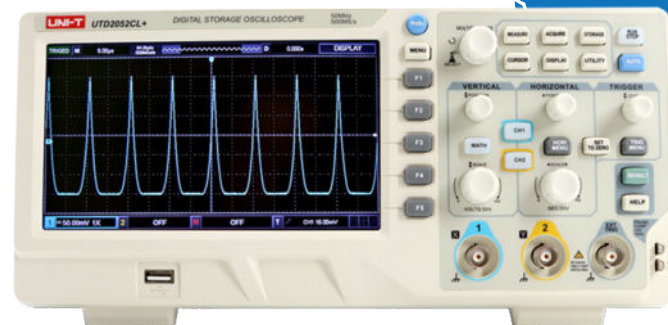

UT-L27 DOUBLE INSULATED TEST LEADS

- Cable Length: 900mm
- Rod Length: 130mm
- Tip Length: 16.3mm Threaded
- CAT Rating: CATIII 1000V, CATIV 600V 10A
- Safety Certificate: EN 61010-031 A1:2015
- Recommended Alligator Clips: UT-C02B
- Double Insulation UL Authenticated Material
- Removable Insulation Cap
- General Type Probes



UT-C02B - Alligator Clips

- Through Hole Alligator Clip
- Length: 80mm
- Clip Opening: 36mm
- CAT Rating: CATIII 1000V, CAT IV 600V 10A
- Insulated with M4 Threaded Bore Screw Connection
- Recommended Test Leads: UT-L13



UT-CS06A 400A AC CURRENT CLAMP SENSOR

- ACA Current: 1~400A
- Jaw Opening: 28mm
- Output Ratio: 1mV/A
- True RMS
- Frequency: 50Hz ~ 400Hz
- Waveform Display: Adaptable Oscilloscope
- Suitable for Most UNI-T Multimeters



UT262E NON-CONTACT PHASE DETECTOR

- Phase Detection
- Live Power Detection
- Circuit Break Detection
- Voltage Detection
- Breakpoints Finding
- Breakpoints Positioning
- Power On Indication
- APO
- AC Voltage: 70V ~ 1000V
- Frequency: 50Hz ~ 60Hz
- Clamp Opening: 10 ~ 40mm



UT261B PHASE SEQUENCE & MOTOR ROTATION INDICATOR

- AC Voltage: 90V ~ 600V
- Frequency: 15Hz ~ 400Hz
- Working Current: < 3mA
- Phase Sequence Indication: LED
- Missing Phase Indication: LED
- Motor Rotation Indication: LED



UT516B - INSULATION RESISTANCE TESTER

- 12KV Digital Insulation Resistance Tester
- Insulation Resistance up to 1000GΩ
- 1000V AC/DC
- Polarization Index (Pi)
- LCD Backlight
- Over-Range Warning
- Low Battery Indication
- Data Logging 18
- USB Interface
- APO
- Comparison Measurement
- 10 000 Display Count



UT586+ - DIGITAL RCD TESTER

- Test ELCB up to 550 Volts for Mining
- RCD Test Function: 10 ~ 1000mA
- Voltage: 100V ~ 440V
- Voltage Test: 30 ~ 480V
- Voltage Test: L-PE and Frequency
- Wiring Check
- Phase Angle Selection
- Lock Test
- Auto Ramp Test
- Over-temperature Detection
- Low Battery Indication
- Backlight
- APO



UT345A - ULTRASONIC THICKNESS GAUGE

- Measurement Range: 1.00 ~ 300.00mm
- Sound Velocity Range: (1000 ~ 9999) m/s
- Unit: mm/in
- Lower Limit of Pipe Measurement: Ø20 x 3mm (steel)
- Data Storage: 300 groups
- Single Measurement, Continuous Measurement, Alarm, Sound Velocity Measurement, Auto Calibration
- Display: 2.4"LCD




UT285CFC DEMO - THREE PHASE POWER QUALITY ANALYSER WITH FLEX CLAMPS

- TRUE RMS Phase-to-Neutral Voltage: 1.0V~1000V
- TRUE RMS Phase-to-Phase Voltage: 1.0V~2000V
- DC Voltage: 1.0V~1000V
- TRUE RMS Current: 10mA~1000A
- Peak of Phase-to-Neutral Voltage: 1.0V~1414V
- Peak of Phase-to-Phase Voltage: 1.0V~2828V
- Current Peak: 10mA~1414A
- Active Power: 0.0VA~9999.9kW
- Reactive Power, Inductive/Capacitive: 0.0RVA~9999.9kVAR
- Apparent Power: 0.0VA~9999.9kVA
- Power Factor: -1.000~1.000
- Active Energy: 0.0Wh~9999.9MWh
- Reactive Energy, Inductive/Capacitive: 0.0VARh~9999.9MVARh
- Apparent Energy: 0.0VAh~9999.9MAh
- Phase Angle: -179°~180°
- Tanφ: -32.76~32.76
- Phase Shift of Power Factor: -1.0~1.0
- Harmonic Ratio: 0.0%~99.9%
- Harmonic Angle: -179°~180°
- Distortion Factor: 0.0%~99.9%
- Transformer K Factor: 1.00~99.99
- 3 Phase Unbalance: 0.0%~100%
- Number of Channels: 4U / 4I
- Parameters of Electricity: W, VA, Var, PF, DPF, cosφ, tanφ
- Energy Parameters: Wh, Varh, Vah
- Harmonic: 50
- Expert Mode
- Number of Transient Records: 150Sets
- MIN / MAX
- Alarm Log
- Auto Phasor Diagram Display
- APO
- Backlight
- USB Interface



UT513A - 5KV INSULATION RESISTANCE TESTER

- 5KV Digital Insulation Resistance Tester
- Insulation Resistance up to 1000GΩ
- 600V AC/DC
- Analogue Bar Graph (30 Segments)
- Data Logging 18
- Polarization Index (Pi)
- Insulation Voltages 500/1000/2500/5000V
- Short Circuit Current < 3mA
- USB Interface
- LCD Backlight
- Over-Range Warning
- Low Battery Indication
- Secondary Display
- Dielectric Absorption (DAR)
- Auto Ranging
- High Voltage Indication
- APO
- Comparison Measurement
- 10 000 Display Count

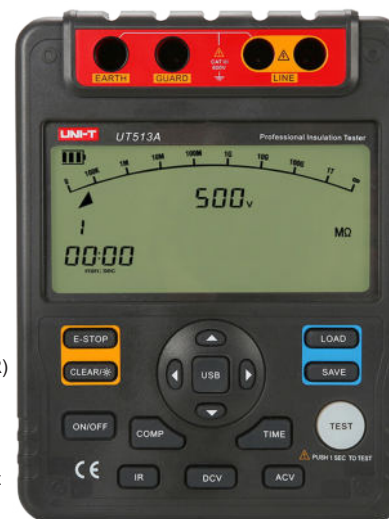

a member of the **Hudaco** group

Promotion runs from 1 September 2025 to 31 December 2025 or while stocks last. Prices exclude VAT. E & OE.

Johannesburg
Tel: +27 11 392 3804

Durban
Tel: +27 31 263 7800

Cape Town
Tel: +27 21 552 5242

Email: sales@three-d.co.za

Website: www.three-d.co.za / www.uni-trend.co.za

THREE-D
AGENCIES
THE CABLE ACCESSORY COMPANY